

T

"T" SERIES - SINGLE CELL PLATFORMS



Small and medium capacity electronic platforms with a AISI304 stainless steel Surface.

- Up to 30000d resolution.
- OIML R60 C3.
- IP67 protection.



The best solution
for advanced industrial
applications

MAIN FEATURES


- Functions with an approved aluminium “single point” load cell according to OIML R60 standards with protection against dust and water splashes according to IP67 standards (350 Ohm input resistance).
- Steel tubular structure, oven-fire painted blue, with adjustable resting feet and level.
- Fitted with AISI 304 satin finish stainless steel loading surface.
- Up to 15 Vdc power supply.
- Shielded 3m connection cable with connectors for connection to the indicator.

OPTIONS FOR ATEX VERSION

- CCATEX: ATEX certificate for each load cell
- DCATEX2GD: Declaration of ATEX conformity of whole PLATFORM + ATEX 2GD DINI ARGEO INDICATOR
- DCATEX3GD: Declaration of ATEX conformity of whole PLATFORM + ATEX 3GD DINI ARGEO INDICATOR

SUPPORT BRACKETS AND COLUMNS

- Example of use with bracket, attached column or floor column.

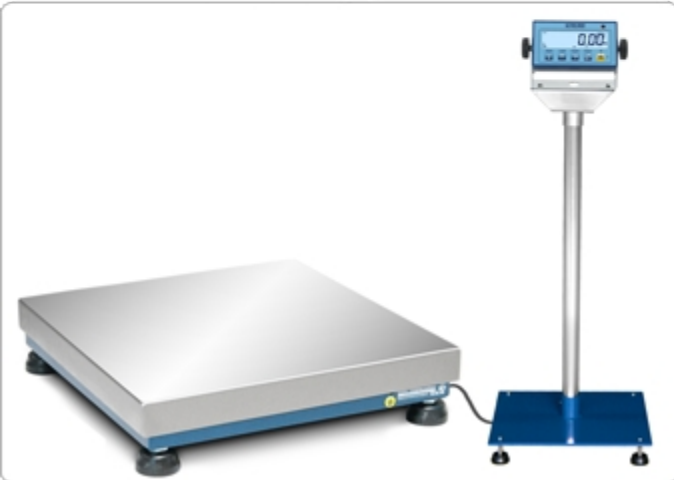

AVAILABLE UPON PRICE ESTIMATE

- Belt and roller units to be applied on the loading Surface.
- Special sizes and capacities.
- IP68/IP69K protection.

VERSIONS

Available versions

| Codice | l x w x h (mm) | Max (kg) | d (g) | M (g)* | M 2R (g)* | d HR (g)* |
|--------|-------------------|-------------|----------|------------------|---------------------|--------------|
| TS3 | 230x330x93 | 3 | 0,5 | 1 | -- | 0,1 |
| TS6 | 230x330x93 | 6 | 1 | 2 | 1-2 | 0,2 |
| TS15 | 230x330x93 | 15 | 2 | 5 | 2-5 | 0,5 |
| TT6 | 330x330x93 | 6 | 1 | 2 | 1-2 | 0,2 |
| TT15 | 330x330x93 | 15 | 2 | 5 | 2-5 | 0,5 |
| TT30 | 330x330x93 | 30 | 5 | 10 | 5-10 | 1 |
| TQ15 | 400x400x115 | 15 | 2 | 5 | 2- 5 | 0,5 |
| TQ30 | 400x400x115 | 30 | 5 | 10 | 5-10 | 1 |
| TQ60 | 400x400x115 | 60 | 10 | 20 | 10-20 | 2 |
| TQ150 | 400x400x115 | 150 | 20 | 50 | 20-50 | 5 |
| TM30 | 400x500x120 | 30 | 5 | 10 | 5-10 | 1 |
| TM60 | 400x500x120 | 60 | 10 | 20 | 10-20 | 2 |
| TM150 | 400x500x120 | 150 | 20 | 50 | 20-50 | 5 |
| TC30 | 500x500x110 | 30 | 5 | 10 | 5-10 | 1 |
| TC60 | 500x500x110 | 60 | 10 | 20 | 10-20 | 2 |
| TC150 | 500x500x110 | 150 | 20 | 50 | 20-50 | 5 |
| TL60 | 500x600x132 | 60 | 10 | 20 | 10-20 | 2 |
| TL150 | 500x600x132 | 150 | 20 | 50 | 20-50 | 5 |
| TL300 | 500x600x132 | 300 | 50 | 100 | 50-100 | 10 |
| TX60 | 600x600x137 | 60 | 10 | 20 | 10-20 | 2 |
| TX150 | 600x600x137 | 150 | 20 | 50 | 20-50 | 5 |
| TX300 | 600x600x137 | 300 | 50 | 100 | 50-100 | 10 |
| TG150 | 700x700x145 | 150 | 20 | 50 | -- | 5 |
| TG300 | 700x700x145 | 300 | 50 | 100 | 50-100 | 10 |
| TG600 | 700x700x145 | 600 | 100 | 200 | 100-200 | 20 |

(*) Divisions obtainable only with the relative options, in combination with Dini Argeo weight indicator.



“YOUR WORLDWIDE PARTNER FOR WEIGHING,”

DINI ARGEO
FRANCE sarl
France

DINI ARGEO
GMBH
Germany

DINI ARGEO
UK Ltd
United Kingdom

DINI ARGEO WEIGHING
INSTRUMENTS Ltd
China

DINI ARGEO
OCEANIA
Australia



COMPANY HEADQUARTERS

Via Della Fisica, 20
41042 Spezzano di Fiorano Modena • Italy
Tel. +39.0536 843418

SERVICE ASSISTANCE

Via Dell'Elettronica, 15
41042 Spezzano di Fiorano Modena • Italy
Tel. +39.0536 921784



SALES AND TECHNICAL ASSISTANCE SERVICE