



PS 4500.R1.M Precision Balance, PS 1000.R1 Precision Balance, PS 3500.R1.M Precision Balance, PS 750.R1 Precision Balance, PS 6100.R1.M Precision Balance, PS 360.R1 Precision Balance, PS 200/2000.R1 Precision Balance, PS 600.R1 Precision Balance

More information on the website  
[radwag.com/en/info,w1,TUN](http://radwag.com/en/info,w1,TUN)



PS 4500.R1.M Precision Balance  
PS 3500.R1.M Precision Balance  
PS 6100.R1.M Precision Balance

PS 1000.R1 Precision Balance  
PS 750.R1 Precision Balance  
PS 360.R1 Precision Balance  
PS 200/2000.R1 Precision Balance  
PS 600.R1 Precision Balance

The drawings, photos and graphics used are for illustrative purposes only.

## Functions



Autotest



Dosing



Percent Weighing



Totalizing



Parts counting



Peak hold



Newton unit measurement



Statistics



Checkweighing



GLP Procedures



Animal weighing



Density determination

# Datasheet

	PS 200/2000.R1 Precision Balance	PS 360.R1 Precision Balance	PS 600.R1 Precision Balance
<b>Metrological parameters</b>			
<b>Maximum capacity [Max]</b>	200 / 2000 g	360 g	600 g
<b>Minimum load</b>	20 mg	20 mg	20 mg
<b>Readability [d]</b>	0,001 / 0,01 g	0,001 g	0,001 g
<b>Tare range</b>	-2000 g	-360 g	-600 g
<b>Repeatability (Max)</b>	0,001 / 0,01 g	0,001 g	0,0015 g
<b>Repeatability (5% Max)</b>	0,0005 / 0,005 g	0,0005 g	0,0005 g
<b>Linearity</b>	±0,002 / 0,02 g	±0,002 g	±0,002 g
<b>Stabilization time</b>	2 / 1,5 s	2 s	2 s
<b>Adjustment</b>	external	external	external
<b>Physical parameters</b>			
<b>Leveling system</b>	manual	manual	manual
<b>Display</b>	LCD (backlit)	LCD (backlit)	LCD (backlit)
<b>Delivery components</b>	Balance, weighing pan, weighing pan shield, grounding bumper ×1, bumper ×3, power supply.	Balance, weighing pan, weighing pan shield, grounding bumper ×1, bumper ×3, power supply.	Balance, weighing pan, weighing pan shield, grounding bumper ×1, bumper ×3, power supply.
<b>Weighing pan dimensions</b>	128×128 mm	128×128 mm	128×128 mm
<b>Device dimensions</b>			
<b>Packaging dimensions</b>	475×380×345 mm	475×380×345 mm	475×380×345 mm
<b>Net weight</b>	3,2 kg	3,2 kg	3,2 kg
<b>Gross weight</b>	5,5 kg	5 kg	4,5 kg
<b>Construction</b>			
<b>Protection class</b>	IP 43	IP 43	IP 43
<b>Communication interface</b>			
<b>Communication interface</b>	2×RS232 <sup>1</sup> , USB-A, USB-B, Wi-Fi (option)	2×RS232, USB-A, USB-B, Wi-Fi (option)	2×RS232 <sup>1</sup> , USB-A, USB-B, Wi-Fi (option)
<b>Electrical parameters</b>			
<b>Power supply</b>	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,4A max	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,4A max	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,4A max
<b>Power consumption max.</b>			
<b>Power consumption</b>	4 W	4 W	4 W
<b>Environmental conditions</b>			
<b>Operating temperature</b>	+10 ÷ +40 °C	+10 ÷ +40 °C	+10 ÷ +40 °C
<b>Storage temperature</b>			
<b>Relative humidity</b>	40% ÷ 80%	40% ÷ 80%	40% ÷ 80%

Repeatability is expressed as a standard deviation from 10 weighing cycles. Stabilization time depends on the ambient conditions and the dynamics of weighing pan loading; specified for FAST profile. 1 Barcode scanners, available as weighing instrument accessory, communicate with the instrument via RS232 interface exclusively.

# Datasheet

	PS 750.R1 Precision Balance	PS 1000.R1 Precision Balance	PS 3500.R1.M Precision Balance
<b>Metrological parameters</b>			
<b>Maximum capacity [Max]</b>	750 g	1000 g	3500 g
<b>Minimum load</b>	20 mg	20 mg	500 mg
<b>Readability [d]</b>	0,001 g	0,001 g	0,01 g
<b>Tare range</b>	-750 g	-1000 g	-3500 g
<b>Repeatability (Max)</b>	0,0015 g	0,0015 g	0,008 g
<b>Repeatability (5% Max)</b>	0,0005 g	0,0005 g	0,005 g
<b>Linearity</b>	±0,003 g	±0,003 g	±0,02 g
<b>Stabilization time</b>	2 s	2 s	1,5 s
<b>Adjustment</b>	external	external	external
<b>Physical parameters</b>			
<b>Leveling system</b>	manual	manual	manual
<b>Display</b>	LCD (backlit)	LCD (backlit)	LCD (backlit)
<b>Delivery components</b>	Balance, weighing pan, weighing pan shield, grounding bumper x1, bumper x3, power supply.	Balance, weighing pan, weighing pan shield, grounding bumper x1, bumper x3, power supply.	Balance, weighing pan, weighing pan shield, power supply
<b>Weighing pan dimensions</b>	128×128 mm	128×128 mm	195×195 mm
<b>Device dimensions</b>			
<b>Packaging dimensions</b>	475×380×345 mm	475×380×345 mm	475×380×345 mm
<b>Net weight</b>	3,2 kg	3,2 kg	3,6 kg
<b>Gross weight</b>	4,5 kg	4,5 kg	5,1 kg
<b>Construction</b>			
<b>Protection class</b>	IP 43	IP 43	IP 43
<b>Communication interface</b>			
<b>Communication interface</b>	2×RS232 <sup>1</sup> , USB-A, USB-B, Wi-Fi (option)	2×RS232 <sup>1</sup> , USB-A, USB-B, Wi-Fi (option)	2×RS232 <sup>1</sup> , USB-A, USB-B, Wi-Fi (option)
<b>Electrical parameters</b>			
<b>Power supply</b>	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,4A max	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,4A max	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,4A max
<b>Power consumption max.</b>			
<b>Power consumption</b>	4 W	4 W	4 W
<b>Environmental conditions</b>			
<b>Operating temperature</b>	+10 ÷ +40 °C	+10 ÷ +40 °C	+10 ÷ +40 °C
<b>Storage temperature</b>			
<b>Relative humidity</b>	40% ÷ 80%	40% ÷ 80%	40% ÷ 80%

Repeatability is expressed as a standard deviation from 10 weighing cycles. Stabilization time depends on the ambient conditions and the dynamics of weighing pan loading; specified for FAST profile. 1 Barcode scanners, available as weighing instrument accessory, communicate with the instrument via RS232 interface exclusively.

# Datasheet

	PS 4500.R1.M Precision Balance	PS 6100.R1.M Precision Balance
<b>Metrological parameters</b>		
Maximum capacity [Max]	4500 g	6100 g
Minimum load	0,5 g	0,5 g
Readability [d]	0,01 g	0,01 g
Tare range	-4500 g	-6100 g
Repeatability (Max)	0,008 g	0,008 g
Repeatability (5% Max)	0,005 g	0,005 g
Linearity	±0,02 g	±0,03 g
Stabilization time	1,5 s	1,5 s
Adjustment	external	external
<b>Physical parameters</b>		
Leveling system	manual	manual
Display	LCD (backlit)	LCD (backlit)
Delivery components	Balance, weighing pan, weighing pan shield, power supply	Balance, weighing pan, weighing pan shield, power supply
Weighing pan dimensions	195×195 mm	195×195 mm
Device dimensions	333x206x107 mm	333x206x107 mm
Packaging dimensions	475×380×345 mm	475×380×345 mm
Net weight	4,5 kg	4,5 kg
Gross weight	5,5 kg	5,5 kg
<b>Construction</b>		
Protection class	IP 43	IP 43
<b>Communication interface</b>		
Communication interface	2×RS232 <sup>1</sup> , USB-A, USB-B, Wi-Fi (option)	2×RS232 <sup>1</sup> , USB-A, USB-B, Wi-Fi (option)
<b>Electrical parameters</b>		
Power supply	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,4A max	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,4A max
Power consumption max.	4 W	
Power consumption	4 W	4 W
<b>Environmental conditions</b>		
Operating temperature	+10 ÷ +40 °C	+10 ÷ +40 °C
Storage temperature	-20 ÷ +50 °C	-20 ÷ +50 °C
Relative humidity	40% ÷ 80%	40% ÷ 80%

Repeatability is expressed as a standard deviation from 10 weighing cycles. Stabilization time depends on the ambient conditions and the dynamics of weighing pan loading; specified for FAST profile. 1 Barcode scanners, available as weighing instrument accessory, communicate with the instrument via RS232 interface exclusively.

\* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.



## Accessories

Balance Storage Case  
Antivibration Tables  
Power Adapters

RS 232, RS 485 cables  
Displays  
Draft Shield

Cigarette lighter receptacle power supply cables  
 USB cable (scale - printer)  
 Density determination KIT  
 Barcode scanners  
 Anti-Draft Chamber for Balances with a 128×128 mm Weighing Pan

Protective cover for balances  
 Receipt Printer  
 RS 232, RS 485 cables  
 Under-pan weighing  
 RS 232 cables (scale - printer)



## Software

RAD-KEY  
 Alibi Reader  
 RADWAG Development Studio



R Panel  
 R-LAB

## Device dimensions



PS 4500.R1.M Precision Balance, PS 1000.R1 Precision Balance, PS 3500.R1.M Precision Balance, PS 750.R1 Precision Balance, PS 6100.R1.M Precision Balance, PS 360.R1 Precision Balance, PS 200/2000.R1 Precision Balance, PS 600.R1 Precision Balance

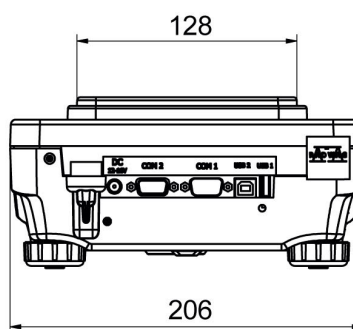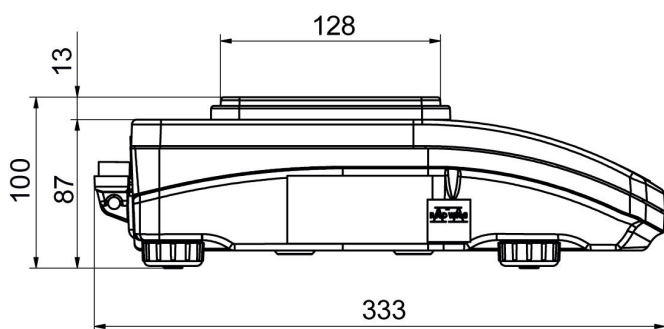

PS R, d = 1 mg

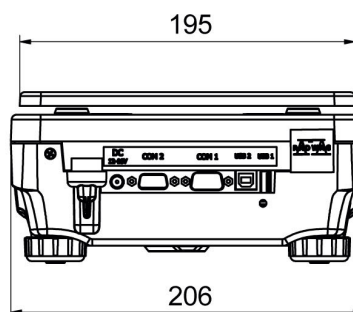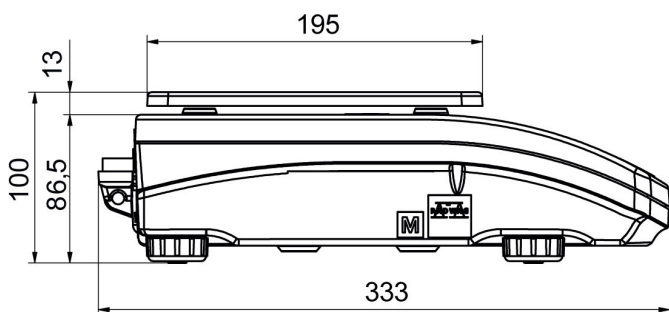

PS R, d = 10 mg

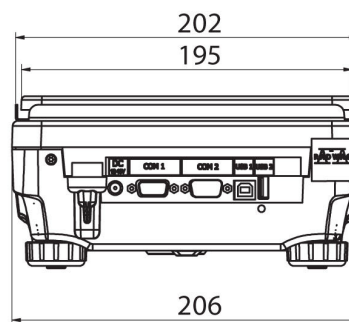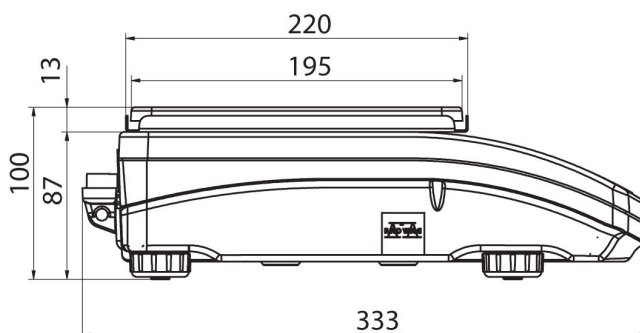

PS R.M, d = 10 mg