



Dual Screen
Bright LED screen and double display to share weighing data on the auxiliary screen.




GX series, indispensable

- Total protection against liquids: IP-67.
- Double bright LED display.
- Weight limits with visual and sound indication.
- Electronic filter to weigh unstable items.
- Internal rechargeable battery.
- Battery state indicator.
- Protection against overload.
- Stainless steel and ABS structure.

External dimensions (mm)

GX-6000
GX-15K
GX-30K

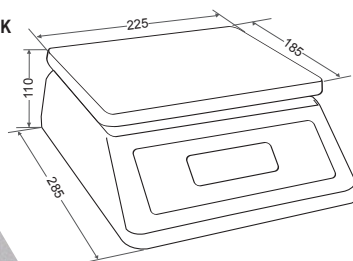

Model	GX-6000	GX-15K	GX-30K
Reference	4576	4577	4578
Capacity (kg)	6.000 g	15.000 g	30.000 g
Resolution (g)	0,5 g	1 g	2 g
Power supply	220V 50/60hz		
Working temperature	-10°C /+40°C		
Battery life	30 - 60 hours		
Viewer	Backlit LED		
Segments	6 digits		
Digit height (mm)	18		
Weighing units	g, gm2, oz, ct		
Structure material	Stainless steel and ABS		
Plate material	Stainless steel		
Air/water-tightness protection	IP-67		
Dim. weighing plate (mm)	225 x 185		
Dim. of the product (mm)	235 x 285 x 110		
Product net weight (kg)	3,7		
Dim. packaging (mm)	325 x 330 x 110		
Total weight with packaging (kg)	4,3		

Ref.	Options
8023	ISOCAL certificate from 0,01 g to 30 kg