



Scales for hygienic food environments

- **Hygienic design:** Finished in AISI-SAE 304 stainless steel to comply with HACCP guidelines.
- **Easy to clean:** Minimises cross-contamination.
- **Watertightness:** IP65 protection against dust and liquids.
- **Customisable:** Configure ticket printouts.
- **Connectivity:** Sends data directly to PC.



► **Features:**

- **Auto-hold:** The weight value remains on the screen, even after the item has been removed.
- **Automatic tare:** With memory for 20 numerical tare values and that of the last item weighed.
- **Verification:** It identifies whether a weight is within a range of values.
- **Part counter:** It determines exact quantities of parts.





► **Applications**

Ideal for dry or damp environments, where regular cleaning with water is required. Suitable for weighing dry and wet foods, ingredients, parts and packaging, and in the industrial and agricultural sectors.



► **New design**

Featuring a silicone joint system without sharp edges or corners to guarantee watertightness, make cleaning easier and minimise residue build-up.

Model	S5i 6	S5i 15	S5i 30	S5i 6RS	S5i 15RS	S5i 30RS
Reference	60727	60728	60729	70249	70151	70152
Capacity (g)	6.000	15.000	30.000	6.000	15.000	30.000
Resolution (g)	0.5	1	2	0.5	1	2
Power input	230V / 50 Hz (Euro)					
Operating temperature	+5°C / +35°C					
Battery duration	30 - 60 hours					
Display	Backlit LCD					
Segments	6 digits					
Digit height (mm)	25					
Weight units	g (kg), lb, oz					
Housing material	AISI-SAE 304 stainless steel					
Connectivity	No		RS 232-C, USB (optional)			
Watertight protection	IP-65					
Dim. of weighing platform (mm)	290 x 210					
Dim. of product (mm)	295 x 334 x 110					
Net product weight (kg)	4,7					
Dim. of packaging (mm)	418 x 390 x 240					
Total weight with packaging (kg)	6,8					
MSRP (€)	---	---	---	---	---	---



► **Direct power cable and rechargeable battery.**

Integrated power cable with gland system to guarantee watertightness. Includes rechargeable battery with a life of 30 to 60 hours.

► **Connectivity**

Connection to printer via RS-232 output or wireless connection (optional). Printout with the date and time of each item weighed, name of the product, batch number, ticket number, gross weight, net weight, tare, header and footer.




► **Multicolour display**

The display changes colour, depending on whether the weight is above (red), below (yellow) or within (green) the range set.



External dimensions (mm)

S5i-6
S5i-15
S5i-30
S5i-6 RS
S5i-15 RS
S5i-30 RS

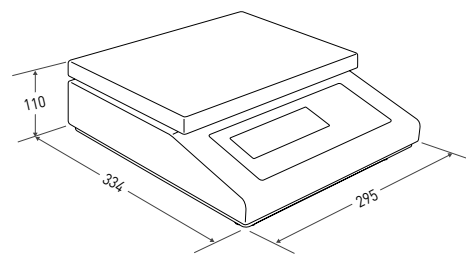

Ref.	Accessories	MSRP(€)
32332	Tare pedal	---
5263	RD3 slave display (compatible with S5i-RS)	---
6950	RD3W wireless slave display	---
70034	PR4 printer with cable (compatible with S5i-RS)	---
70035	PR4W wireless printer	---
70036	PR6 printer with cable (compatible with S5i-RS)	---
70037	PR6W wireless printer	---
60210	Three-light LED signal with relay board	---
4877	Virtual Key software for PC (compatible with S5i-RS)	---
61084	Direct USB cable (compatible with S5i-RS)	---
36788	1.5-m RS-232 cable for RD3 or PC (compatible with S5i-RS)	---
3739	4-m RS-232 cable for RD3 or PC (compatible with S5i-RS)	---